

a multi-purpose machine



The **CH** from **Ovlac** is a stubble cultivator suitable for a large variety of tasks in almost any kind of soil given its clearance and sturdiness. Fitted with wing shares it can do shallow cultivation whereas using its standard point it can break up the soil down to 40 cm.

With an under beam clearance of 87 cm and a generous row spacing, **Ovlac's CH** can handle any kind of trash no matter how abundant or difficult it is. In addition, the **CH** is also available in 3 rows to assure a free and easy flow of the trash.

The **CH** can be fitted with a wide variety of accessories to meet any requirement and be sure to deliver a superb finish. On top of the typical cage rollers (bars or notched plates), you can opt for a leafspring roller or a V-Profile Double disc roller. You can also go for a "V" disc harrow which can also be hydraulically folded on top of the **CH** for a safe and easy transport on the road.

The leafspring auto reset protection of the **CH** is 100% maintenance-free as it has absolutely no greasers or bushes. You save time and money.

The tines for the **Ovlac Chisel** are made from solid (not hollow) Hel steel. This, combined with the strength of the 100 mm square box section main frame and the welded wrap around tine leg mounting brackets allows the **Ovlac CH** breakaway to have a force of 860 Kg. This feature is unique to **Ovlac** and ensures that the position of the points remains at the optimum working angle and depth.



		working width m.	transport width m.	recom. power CV.	weight 2 rows / 3 rows Kgs.	clearance cm.	tine spacing cm.
	CH-7	2 m	2 m	75-100	780 885		
	CH-9	2,5 m	2,5 m	100-135	910 1035		
	CH-11	3 m	3 m	125-165	1050 1195		27,5
	CH-13	3,5 m	3,7 m	145-195	1195 1370		
	CH-15	4,1 m	4,3 m	160-225	1340 1540	87	—
	CH-15-P	4,25 m	3 m	160-225	1720 1820		
	CH-17-P	4,85 m	3 m	180-250	1860 2085		
	CH-19-P	5,4 m	3 m	200-285	2015 2260		28,5
	CH-21-P	6 m	3 m	220-300	2160 2450		

Polígono Industrial, P-163 / 165
34.200 Venta de Baños
Palencia / España
t. +34 979 76 10 11
f. +34 979 76 10 22
comercial@ovlac.com
www.ovlac.com



ovlac chisel

options chisel



chisel 2 rows

Having the CH in 2 rows is advisable when no special clearance is required or when heavy accessories are fitted at the rear like a "V" disc harrow or a "V" Profile Double Disc roller.



Notched plate roller 400 mm



Cage roller 450 or 540 mm




V-Profile Double Disc Roller



Tandem roller



Leafspring roller

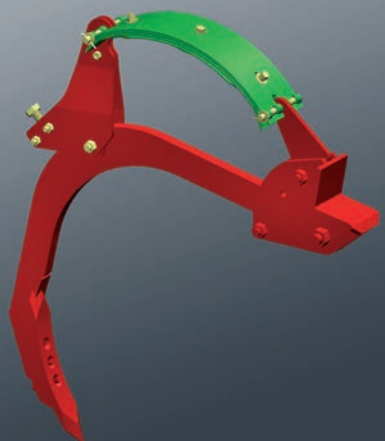

Fitted with universal cultivator point



Fitted with reversible plough point. Wing shares can be fitted as an option.

chisel

- Mounted stubble cultivator with leafspring Auto Reset protection
- Fitted with reversible plough point or universal cultivator point
- Available in 2 or 3 rows
- Tines made of HEL anti-wear steel
- 87 cm under beam clearance
- 100 x 100 mm square profile frame
- 28 cm tine spacing
- Can work up to 40 cm deep



Side wheels for a better depth control



Wing share

chisel 3 rows

3 rows is a recommended option to cope with large amounts of trash



Rear "V" disc harrow with hydraulic folding on top of the CH for transport

